


BORING INSTRUCTIONS

ADJUST-A-BODY® TENSIONER WITH THREADED BOLT

Drill and tap holes as indicated below:

Part No.	Used with Cable Dia.	Drill and Tap Hole
A-JTB6	1/8"	5/16-24 2B
	3/16"	
A-JTB8	1/4"	

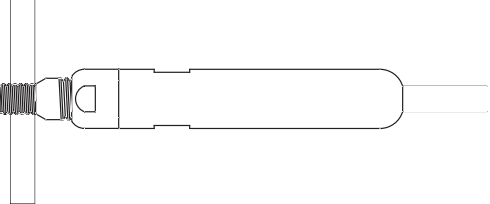


The diagram shows a side view of the Adjust-A-Body Tensioner with Threaded Bolt. A vertical line represents the mounting surface. An arrow points from the 'Drill and Tap Hole' column of the table to the threaded section of the tensioner where it meets the mounting surface.

ADJUST-A-BODY® TENSIONER WITH THREADED EYE

If part is being mounted using an Invisiware® Fixed Tab or Threaded Tab, see boring instructions for those parts.

If part is being mounted to a structural tee, angle iron or steel plate, drill holes as indicated below:

Part No.	Used with Cable Dia.	Hole Dia.	Max Dimension from Front Edge of Mounting Surface to Hole Center
A-JTE6	1/8"	5/16" (.313")	3/8" (.375")
	3/16"		
A-JTE8	1/4"	7/16" (.438")	1/2" (.500")

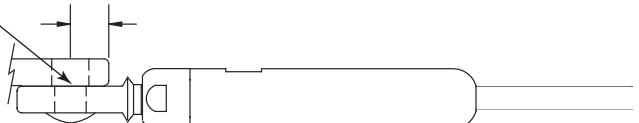


The diagram shows a side view of the Adjust-A-Body Tensioner with Threaded Eye. An arrow points from the 'Max Dimension from Front Edge of Mounting Surface to Hole Center' column of the table to the hole in the mounting surface. Dimension lines indicate the distance from the front edge of the mounting surface to the center of the hole.

ADJUST-A-JAW® TENSIONER AND ULTRA-TEC® FIXED JAW

If part is being mounted using an Invisiware® Fixed Tab or Threaded Tab, see boring instructions for those parts.

If part is being mounted to a structural tee, angle iron or steel plate, drill holes as indicated below:

Part No.	Used with Cable Dia.	Hole Dia.	Max Dimension from Front Edge of Mounting Surface to Hole Center	Jaw Opening
A-J62	1/8"	5/16" (.313")	3/8" (.375")	.260"
	3/16"			
A-J82	1/4"	7/16" (.438")	1/2" (.500")	.390"
A-J122	5/16"		9/16" (.563")	
		3/8"		


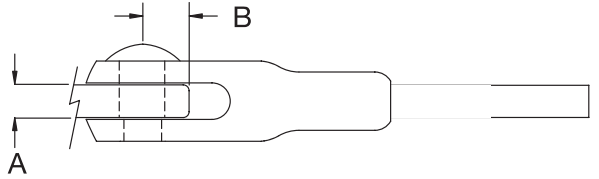


The diagram shows a side view of the Adjust-A-Jaw Tensioner and Ultra-Tec Fixed Jaw. Dimension lines 'A' and 'B' are shown. Dimension 'A' indicates the jaw opening, and dimension 'B' indicates the distance from the front edge of the mounting surface to the hole center.

BORING INSTRUCTIONS



INVISIWARE® CLIP-ON STOP

Used with square or rectangular structural steel tubing. We recommend a minimum 1/4" wall.

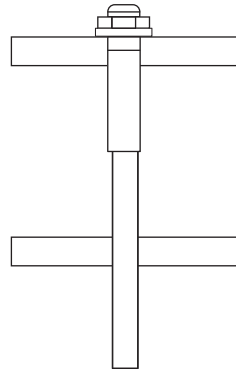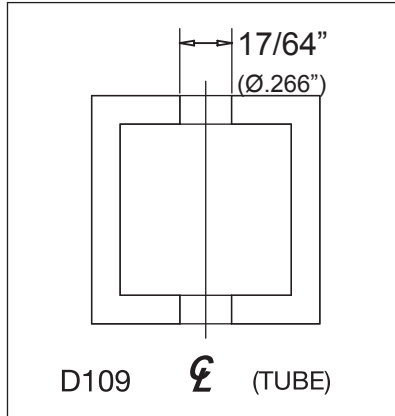

Invisiware® Clip-on Stop with square or rectangular structural steel tubing.



Used with flat bar.

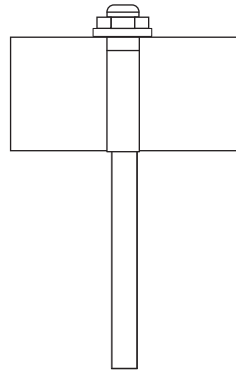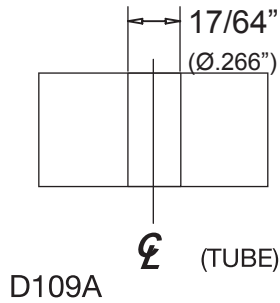

Invisiware® Clip-on Stop with flat bar.

Used with minimum SC80 round pipe or round steel tubing.

If using round steel tubing, wall thickness should be at least comparable to schedule 80 pipe.

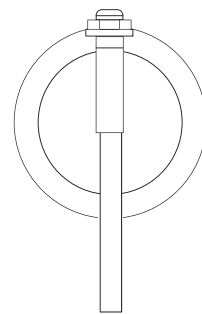
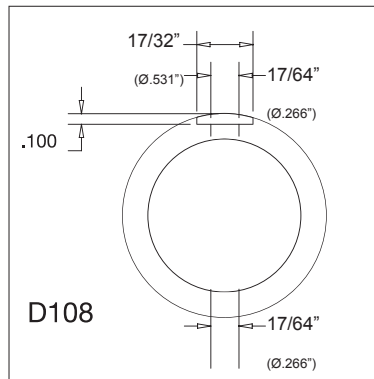


Invisiware® Clip-on Stop with round pipe or steel tubing.



BORING INSTRUCTIONS

INVISIWARE® FIXED TAB



Used with double end post construction using 2"x1" or 3"x1" rectangular tubing with 1-inch spacers.

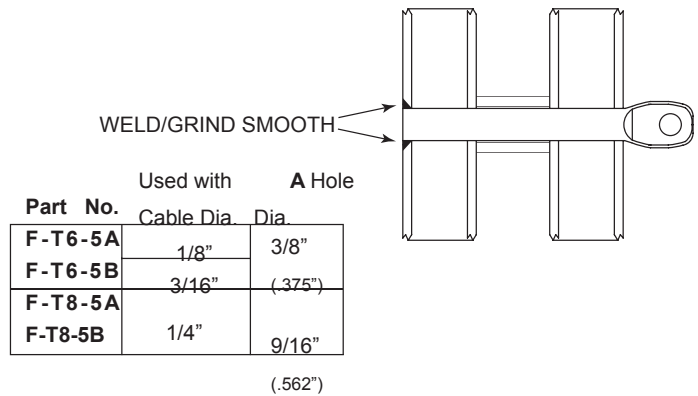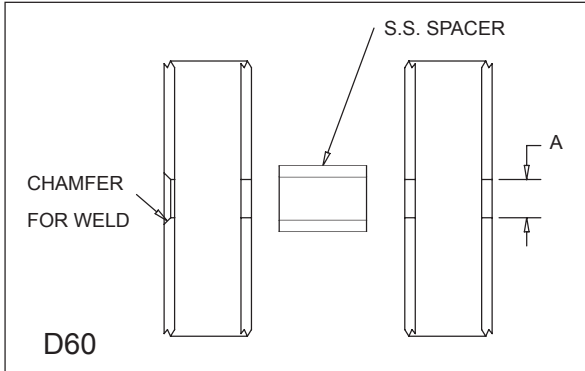

Used with square or rectangular tubing with minimum .250" wall thickness, or round steel tubing with wall thickness at least comparable to SC80 pipe.

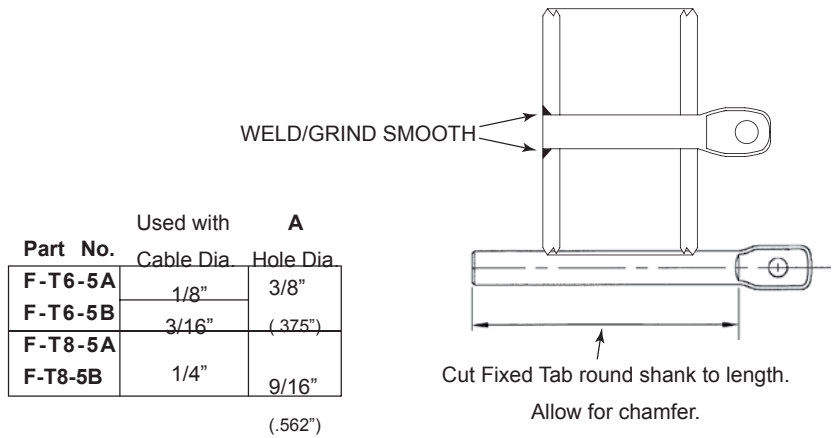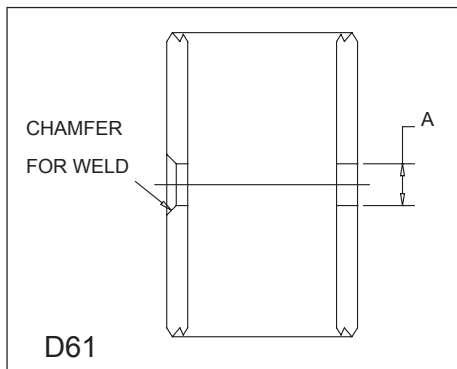

Used with minimum SC80 pipe.

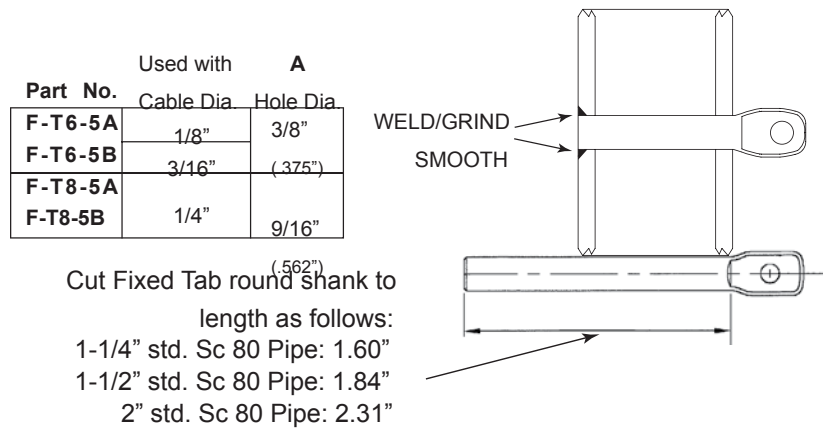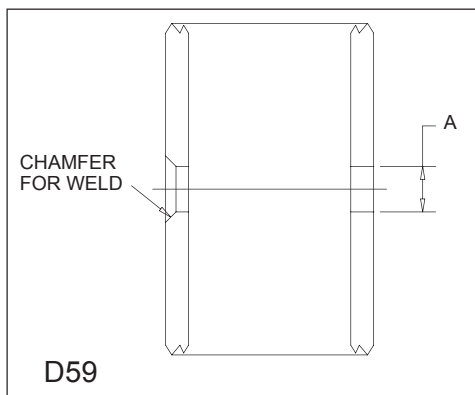

BORING INSTRUCTIONS


INVISIWARE® RADIUS FERRULE

Used with square or rectangular tubing. We recommend a minimum 1/4" wall.

Part No. RF-4

Cable Dia: 1/8"


*see note if using grommets

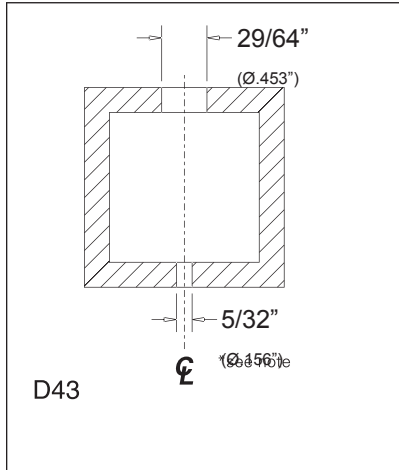

Part No. RF-6

Cable Dia: 3/16"



*see note if using grommets

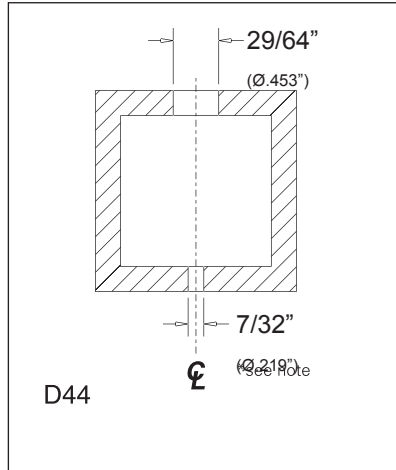

Part No. RF-8

Cable Dia: 1/4"

*see note if using grommets

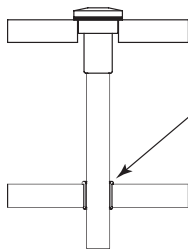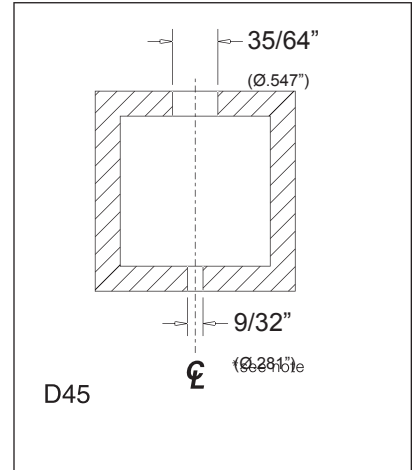


*Note: If grommets are being used, hole through which cable passes should be drilled as follows:

RF-4: 1/4" (.250")

RF-6: 1/4" (.250")


RF-8: 5/16" (.312")

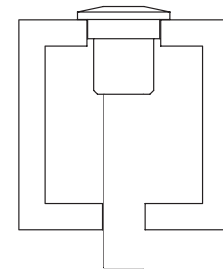

(TUBE)


Part No. RF-10

Cable Dia: 5/16"

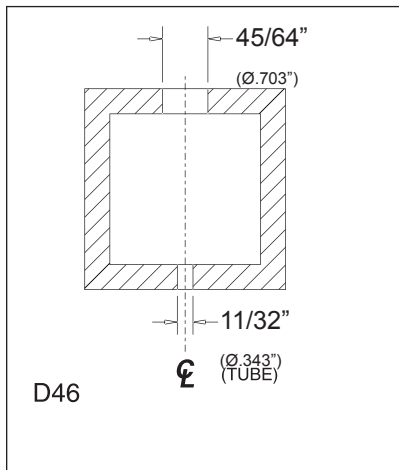

Part No. RF-12

Cable Dia: 3/8"

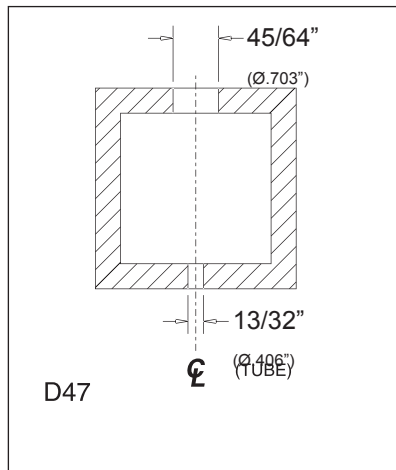


Invisiware® Radius Ferrule with square or rectangular tubing.

Grommets are not offered for use with RF-10 and RF-12 Radius Ferrules.


BORING INSTRUCTIONS

INVISIWARE® RADIUS FERRULE
Used with flat bar or steel plate.


Part No. RF-4
Cable Dia: 1/8"

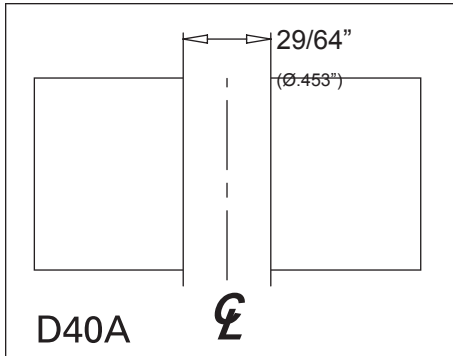


Part No. RF-6
Cable Dia: 3/16"

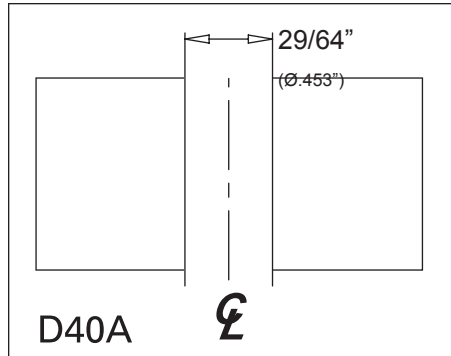



Part No. RF-8
Cable Dia: 1/4"

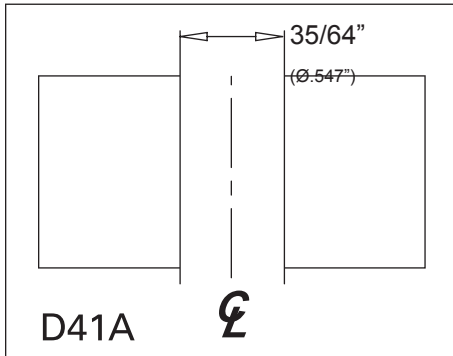

Part No. RF-10
Cable Dia: 5/16"

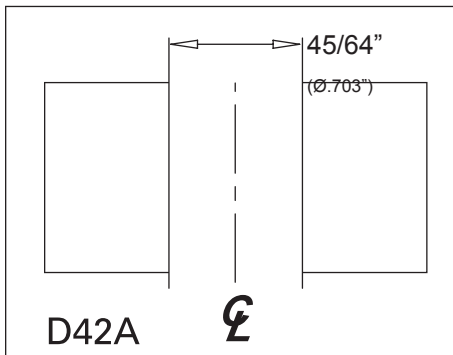

Part No. RF-12
Cable Dia: 3/8"

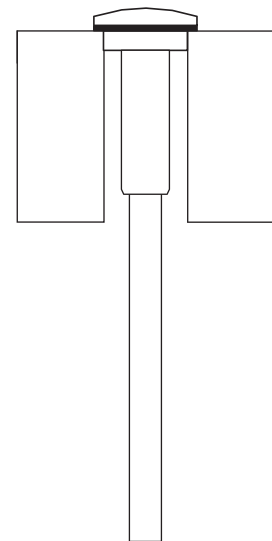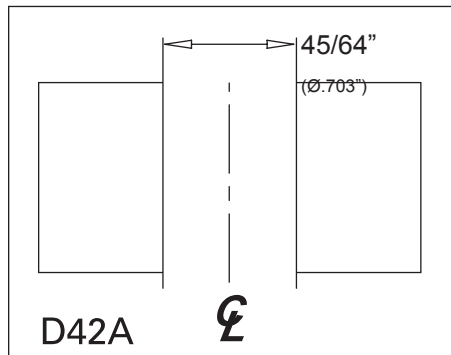

Invisiware® Radius Ferrule
with flat bar or steel plate.

BORING INSTRUCTIONS

INVISIWARE® RADIUS FERRULE


Used with minimum SC80 round pipe or round steel tubing.

If using round steel tubing, wall thickness should be at least comparable to SC80 pipe.

Part No. RF-4

Cable Dia: 1/8"


***see note if using grommets**

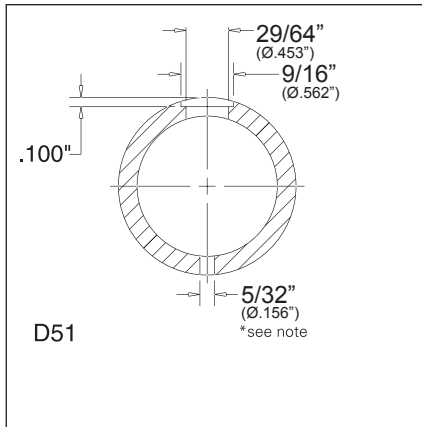

Part No. RF-6

Cable Dia: 3/16"


***see note if using grommets**

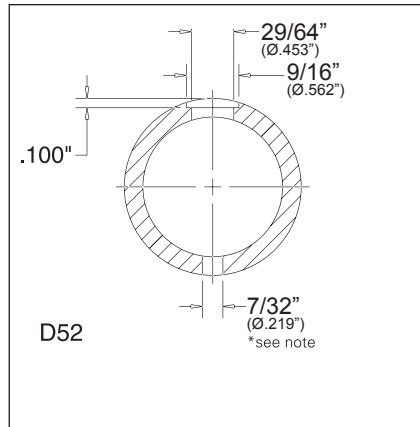

Part No. RF-8


Cable Dia: 1/4"

***see note if using grommets**

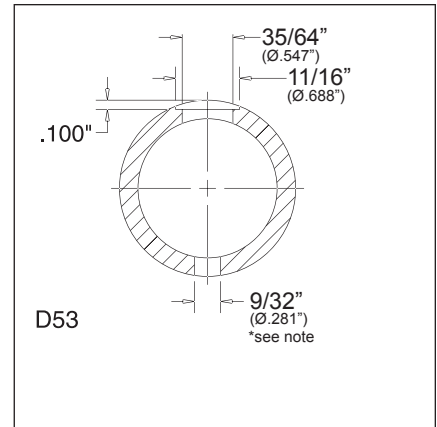

***Note:** If grommets are being used, hole through which cable passes should be drilled as follows:


- RF-4: 1/4" (.250")**
- RF-6: 1/4" (.250")**
- RF-8: 5/16" (.312")**

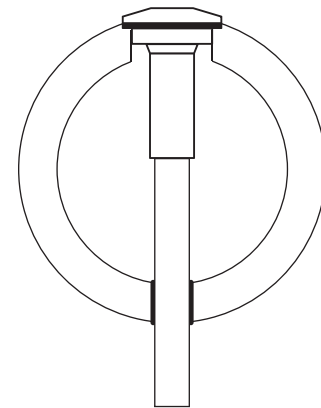

**Invisiware® Radius Ferrule
with round pipe or
round steel tubing.**


Part No. RF-10

Cable Dia: 5/16"

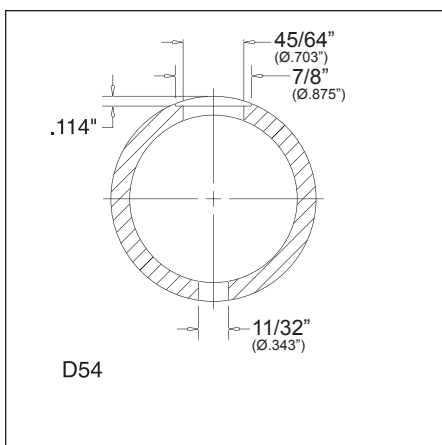

Part No. RF-12

Cable Dia: 3/8"

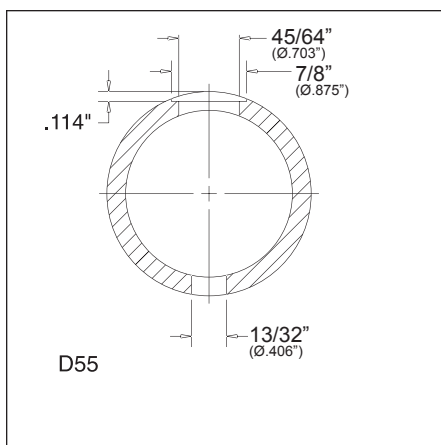

Grommets are not offered for use with RF-10 and RF-12 Radius Ferrules.

BORING INSTRUCTIONS


INVISIWARE® RECEIVER

Used with double end post construction using 2"x1" or 3"x1" rectangular tubing with 1-inch spacers.

Part Nos.

R-6-12 through R-6-62


Cable Dia: 1/8" and 3/16"

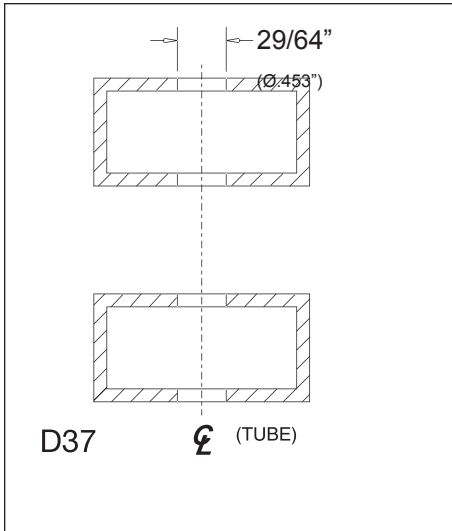

Part Nos.

R-8-22 through R-8-52

Cable Dia: 1/4"


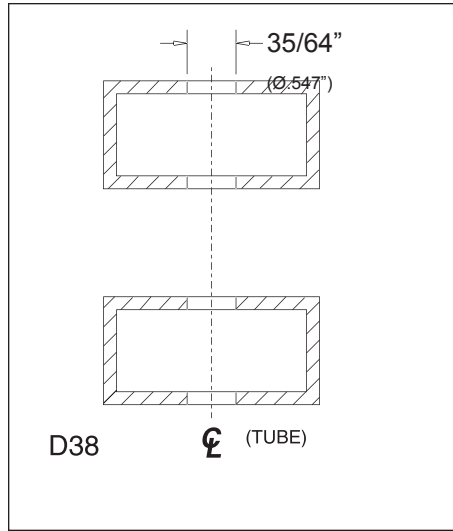


Part Nos.

R-12-32 through R-12-52

Cable Dia: 5/16" and 3/8"

Drill 4 places

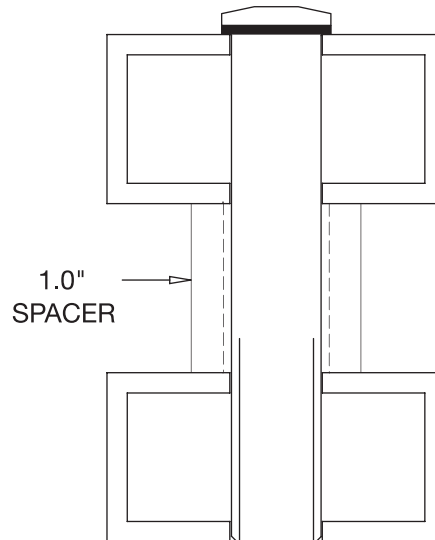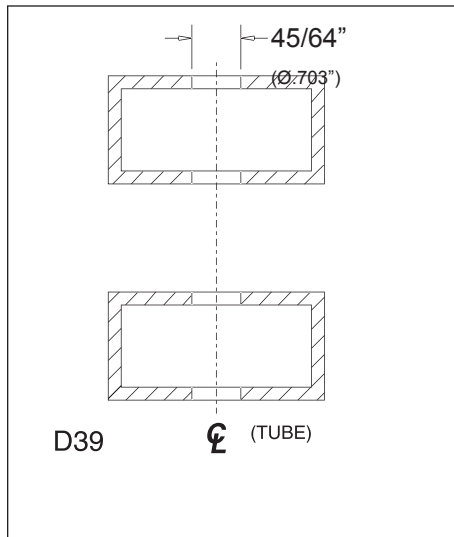

Invisiware® Receiver used with double end post construction using rectangular tubing with 1-inch spacers.
D38A

BORING INSTRUCTIONS

INVISIWARE® RECEIVER


Used with square or rectangular tubing. We recommend a minimum 1/4" wall.

Part Nos.

R-6-12 through R-6-62

Cable Dia: 1/8" and 3/16"

Drill 2 places

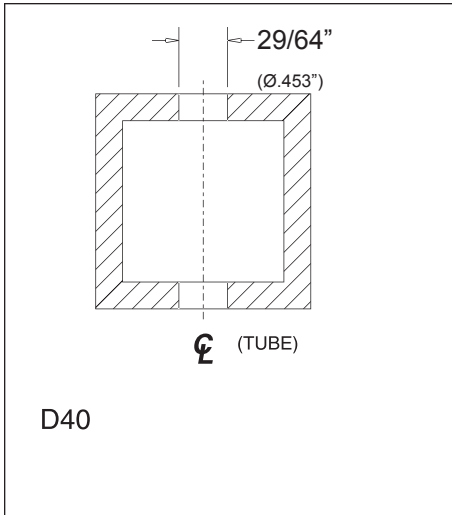


Part Nos.

R-8-22 through R-8-52

Cable Dia: 1/4"

Drill 2 places


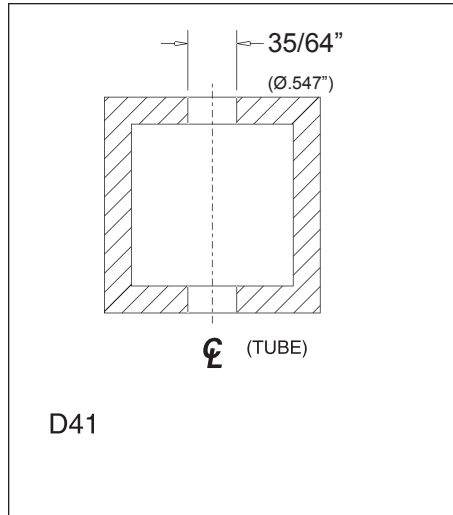


Part Nos.

R-12-32 through R-12-52

Cable Dia: 5/16" and 3/8"

Drill 2 places

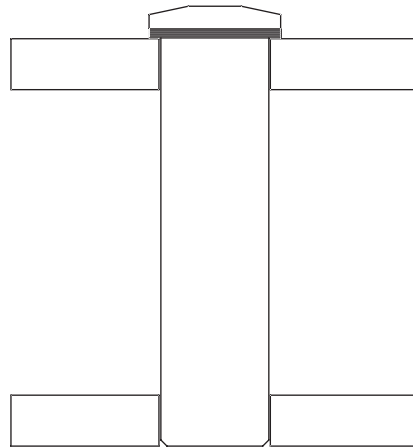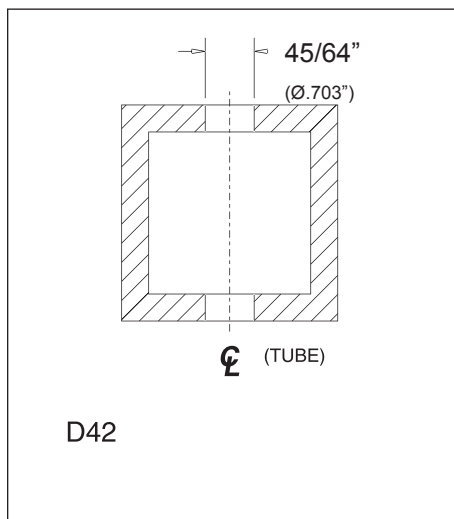

Invisiware® Receiver used square or rectangular tubing.

BORING INSTRUCTIONS


INVISIWARE® RECEIVER

Used with flat bar or steel plate.

Part Nos.

R-6-12 through R-6-62


Cable Dia: 1/8" and 3/16"

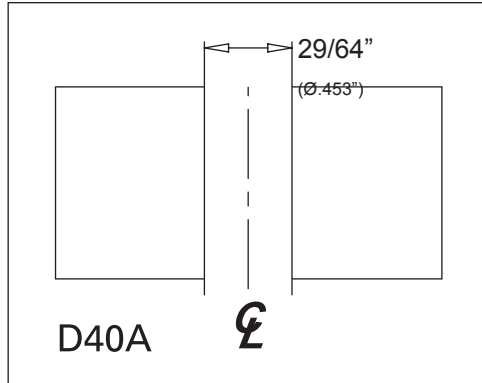

Part Nos.

R-8-22 through R-8-52



Cable Dia: 1/4"

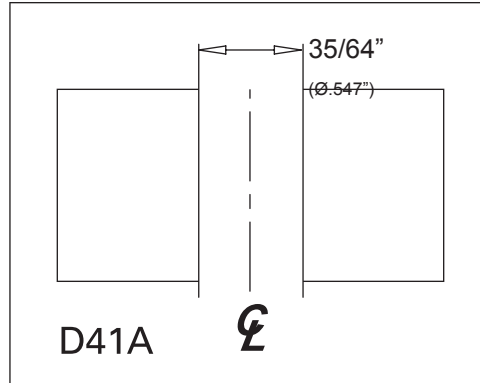

Part Nos.

R-12-32 through R-12-52

Cable Dia: 5/16" and 3/8"

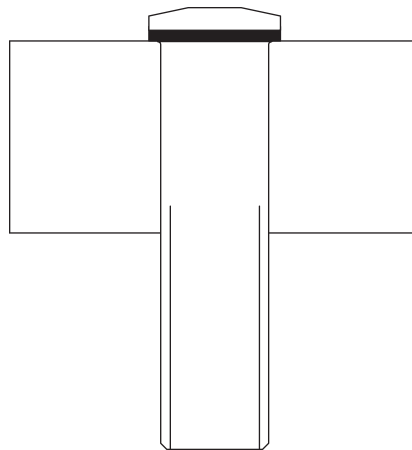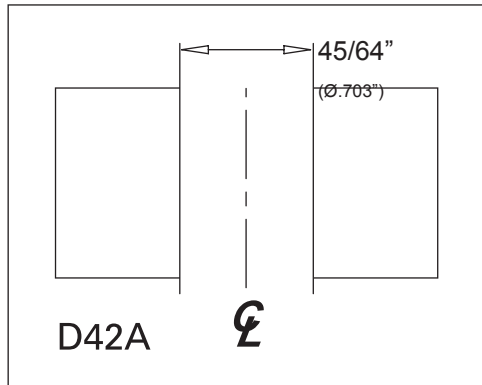

Invisiware® Receiver used with flat bar or steel plate.

BORING INSTRUCTIONS

INVISIWARE® RECEIVER


Used with minimum SC80 round pipe or round steel tubing.

If using round steel tubing, wall thickness should be at least comparable to SC80 pipe.

Part Nos.

R-6-12 through R-6-62


Cable Dia: 1/8" and 3/16"

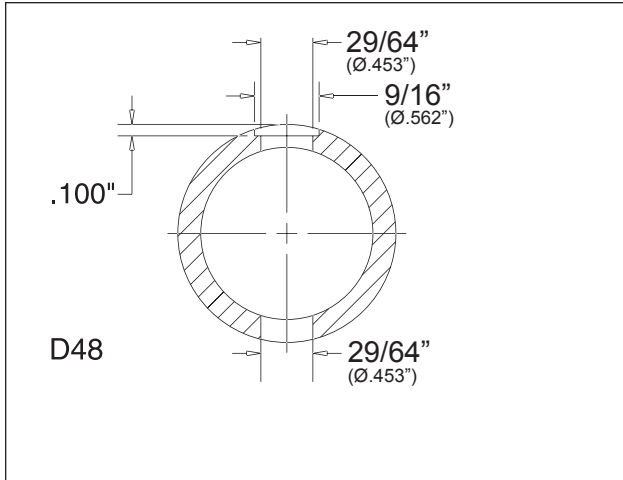

Part Nos.

R-8-22 through R-8-52



Cable Dia: 1/4"

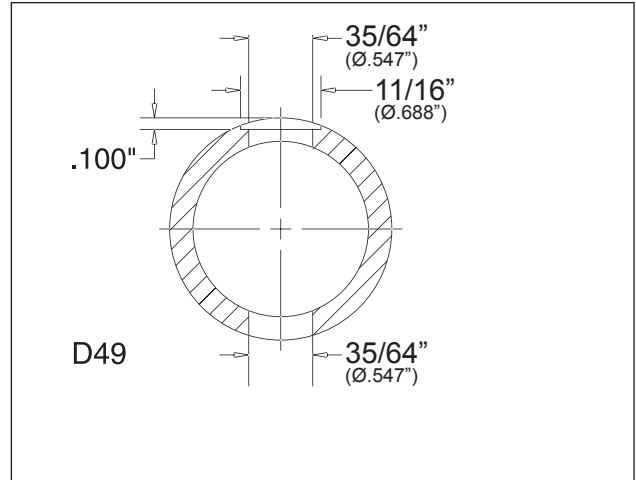

Part Nos.

R-12-32 through R-12-52

Cable Dia: 5/16" and 3/8"

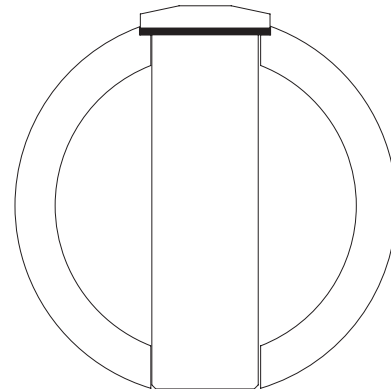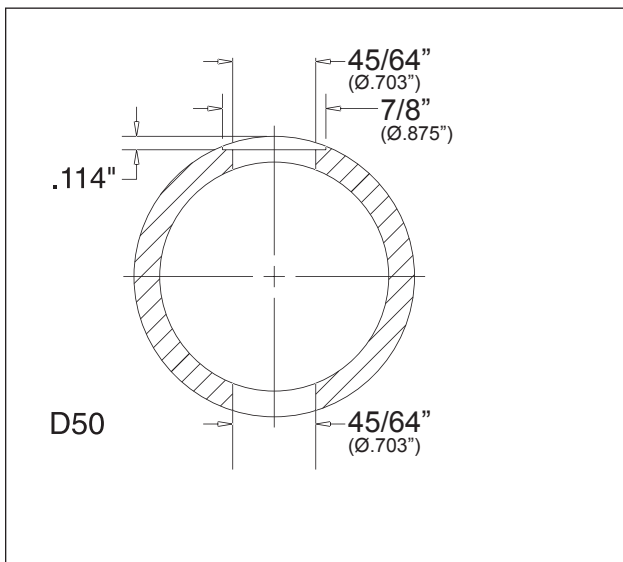


Invisiware® Receiver used with pipe.

BORING INSTRUCTIONS

INVISIWARE® SWAGING STUD

Used in drilled and tapped hole in end post as indicated below (*see Note).

Part No.	Cable Dia.	Drill and Tap Hole
S-4	1/8"	5/16 - 24 UNF CL 2-B RH
S-6	3/16"	
S-8	1/4"	7/16 - 20 UNF CL 2-B RH
S-10	5/16"	9/16 - 18 UNF CL 2-B RH
S-12	3/8"	

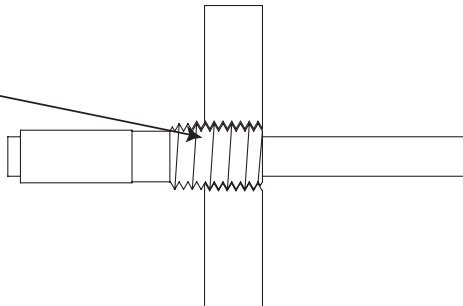


Construction Material *Note: Recommended minimum wall thicknesses:

Pipe	Minimum Schedule 80
Round Steel Tubing	At least equivalent to Schedule 80 Pipe
Square or Rectangular Structural Steel Tubing	.250"
Steel Flat Bar or Plate	.250" or heavier to support a load of 1,537 lbs. on the Swaging Stud. <i>We do not recommend 1/4" flat bar as an end post.</i>


INVISIWARE® THREADED TAB

Drill and (if applicable) tap holes in end post as indicated below (*see Note).

Part No.	Cable Dia.	Drill and Tap Hole
TT-6B	1/8"	5/16 - 24 UNF CL 2-B RH
	3/16"	
TT-8B	1/4"	
	3/8"	



Part No.	Cable Dia.	Drill Hole
TT-6B-L	1/8"	7/16" (.4375")
	3/16"	





Construction Material *Note: Recommended minimum wall thicknesses:

Pipe	Minimum Schedule 80
Round Steel Tubing	At least equivalent to Schedule 80 Pipe
Square or Rectangular Structural Steel Tubing	.250"

BORING INSTRUCTIONS

INVISIWARE® WELDED RECEIVER

Used with double end post construction using 2"x1' or 3"x1" rectangular tubing with 1-inch spacers.

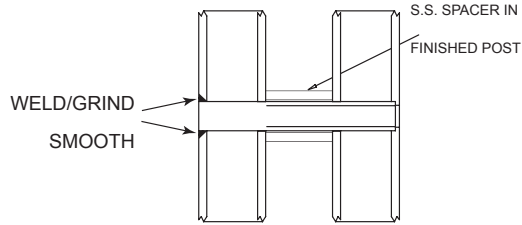
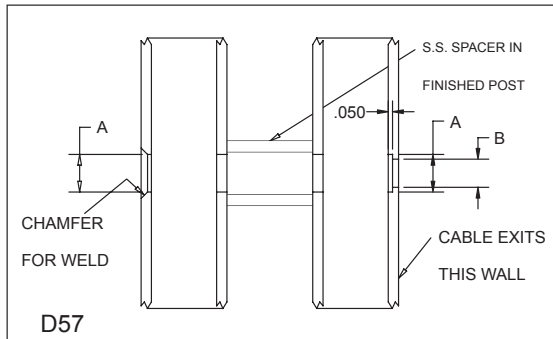


Part No.	Cable Dia.	Used with Hole Diameters	
		A	B
WR-6-5A	1/8"	7/16"	21/64"
WR-6-5B	3/16"	(.437")	(.328")
WR-8-5A	1/4"	17/32"	29/64"
WR-8-5B	1/4"	(.531")	(.453")

Note: When properly installed, the Welded Receiver will rest against the lip of the inside wall through which the cable exits.

Used with square or rectangular tubing with minimum .250" wall thickness, or round steel tubing with wall thickness at least comparable to SC80 pipe.

If using round steel tubing, wall thickness must be at least comparable to SC80 pipe.

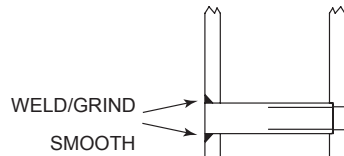
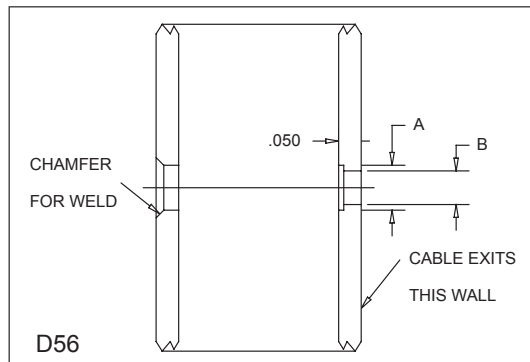


Part No.	Cable Dia.	Used with Hole Diameters	
		A	B
WR-6-5A	1/8"	7/16"	21/64"
WR-6-5B	3/16"	(.437")	(.328")
WR-8-5A	1/4"	17/32"	29/64"
WR-8-5B	1/4"	(.531")	(.453")



Note: Cut Welded Receiver to length. Allow for dimension for part to rest against the lip on the inside wall through which the cable exits.

Used with minimum SC80 round pipe.

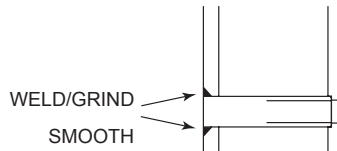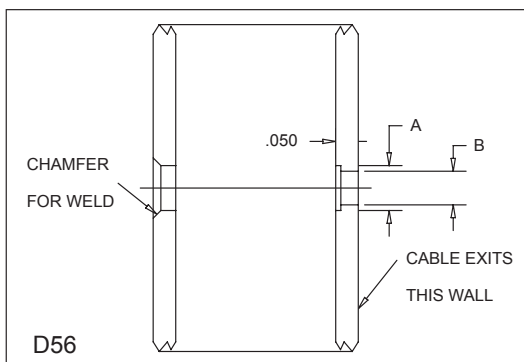

Part No.	Cable Dia.	Used with Hole Diameters	
		A	B
WR-6-5A	1/8"	7/16"	21/64"
WR-6-5B	3/16"	(.437")	(.328")
WR-8-5A	1/4"	17/32"	29/64"
WR-8-5B	1/4"	(.531")	(.453")



Cut Welded Receiver to length as follows:



- 1-1/4" std. Sc 80 Pipe: 1.44"
- 1-1/2" std. Sc 80 Pipe: 1.675"
- 2" std. Sc 80 Pipe: 2.137"

BORING INSTRUCTIONS

PUSH-LOCK™ and PULL-LOCK™ STOP-END FITTINGS

Used with flat bar or steel plate.

Cable Dia: 1/8" and 3/16"

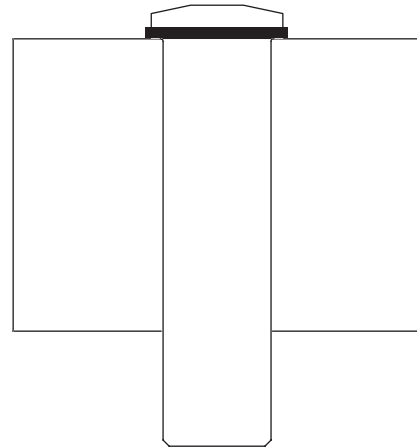
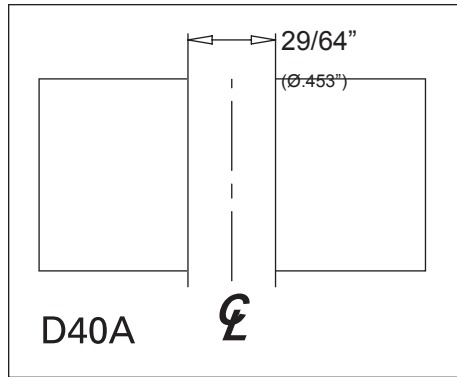


Push-Lock™ or Pull-Lock™ fitting used with flat bar or steel plate.

PUSH-LOCK™ and PULL-LOCK™ STOP-END FITTINGS

Used with square or rectangular tubing up to 1-1/2" in through direction. We recommend a minimum 1/4" wall.

Cable Dia: 1/8" and 3/16"

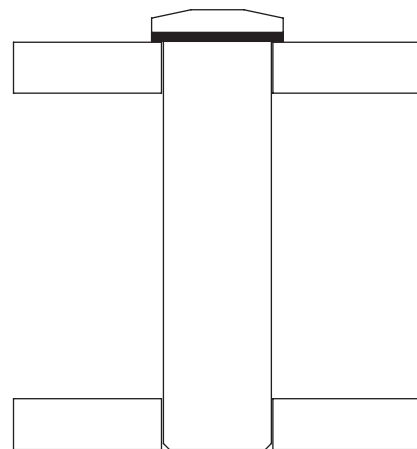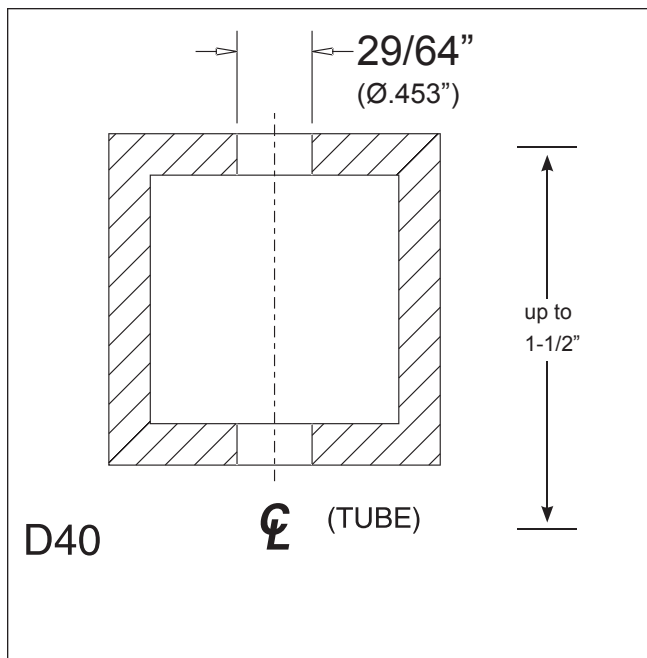



Push-Lock™ or Pull-Lock™ fitting used with square or rectangular tubing.

BORING INSTRUCTIONS

PUSH-LOCK™ and PULL-LOCK™ STOP-END FITTINGS

Used with square or rectangular tubing over 1-1/2" outside-to-inside tube dimension in through direction. We recommend a minimum 1/4" wall.

Cable Dia: 1/8" and 3/16"

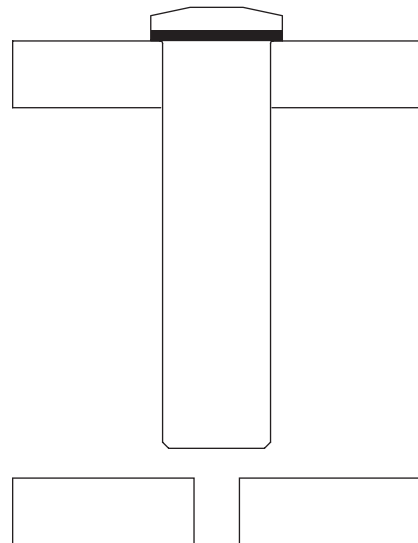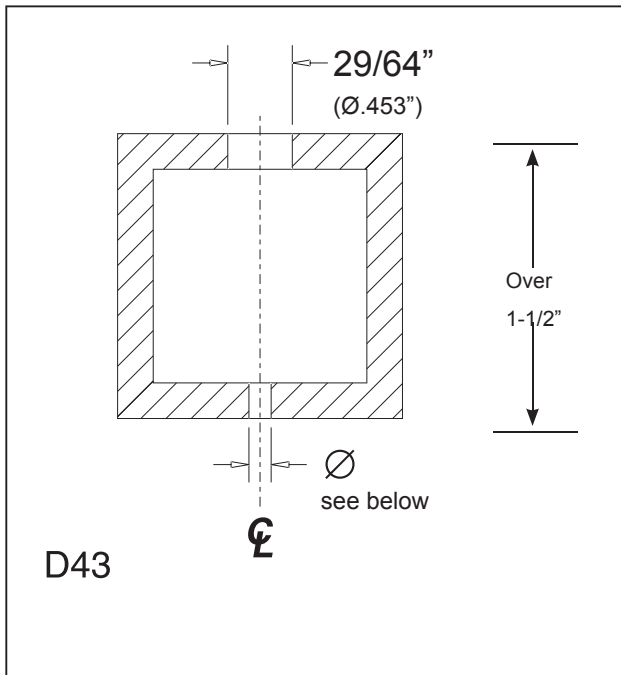

Push-Lock™ or Pull-Lock™ fitting used with square or rectangular tubing.



Cable Diameter	Hole Diameter
1/8"	5/32" (.156")
3/16"	7/32" (.218")
with grommet installed	1/4" (.250")

BORING INSTRUCTIONS

PUSH-LOCK™ and PULL-LOCK™ STOP-END FITTINGS

Used with minimum SC80 1-1/4" round pipe or round steel tubing with comparable dimensions.

Cable Dia: 1/8" and 3/16"

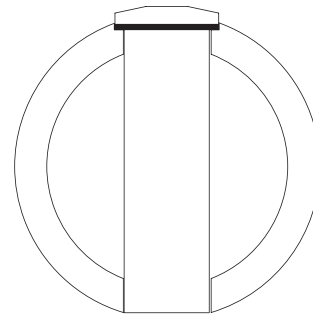
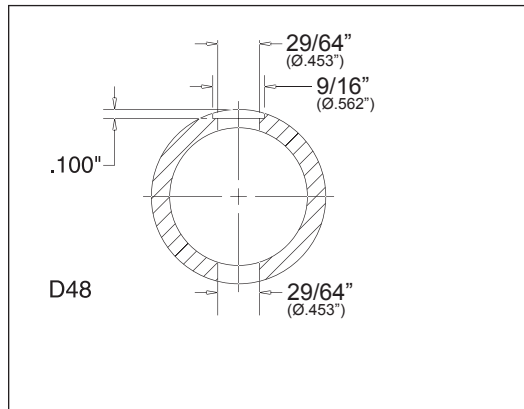


Push-Lock™ or Pull-Lock™ fitting used with round pipe or tubing.

PUSH-LOCK™ and PULL-LOCK™ STOP-END FITTINGS

Used with minimum SC80 1-1/2" or larger round pipe or round steel tubing with comparable dimensions.

Cable Dia: 1/8" and 3/16"

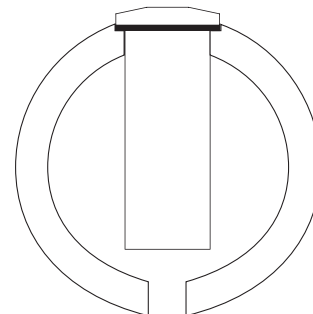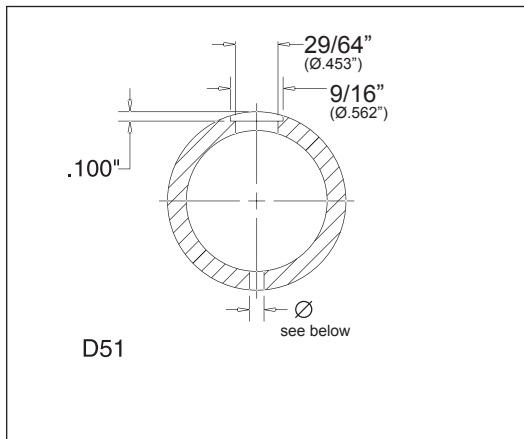


Push-Lock™ or Pull-Lock™ fitting used with 1-1/2" or larger diameter round pipe or comparable tubing.

Cable Diameter	Hole Diameter
1/8"	5/32" (.156")
3/16"	7/32" (.218")
with grommet installed	1/4" (.250")

BORING INSTRUCTIONS

PUSH-LOCK™ THREADED BOLT

Drill and tap holes in end post as indicated below (*see Note).

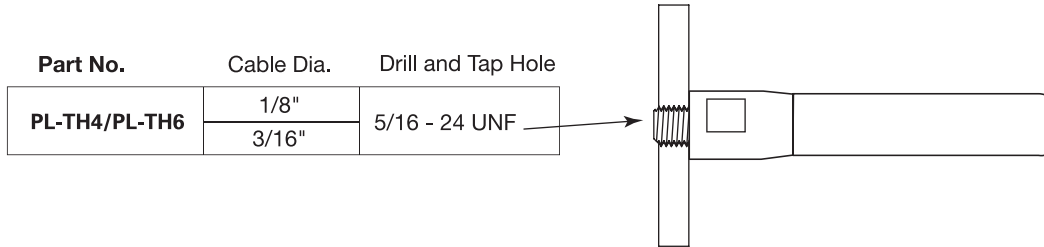

Construction Material ***Note:** Recommended minimum wall thicknesses:


Pipe	Minimum Schedule 80
Round Steel Tubing	At least equivalent to Schedule 80 Pipe
Square or Rectangular Structural Steel Tubing	.250"

BORING INSTRUCTIONS


RECEIVER WITH PUSH-LOCK™ STUD FITTINGS

Used with flat bar or steel plate.

Cable Dia: 1/8" and 3/16"

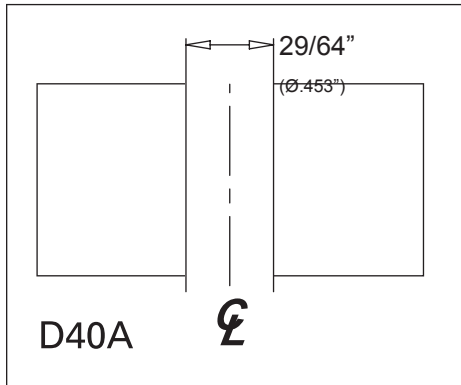


Receiver with Push-Lock™ Stud used with flat bar or steel plate.

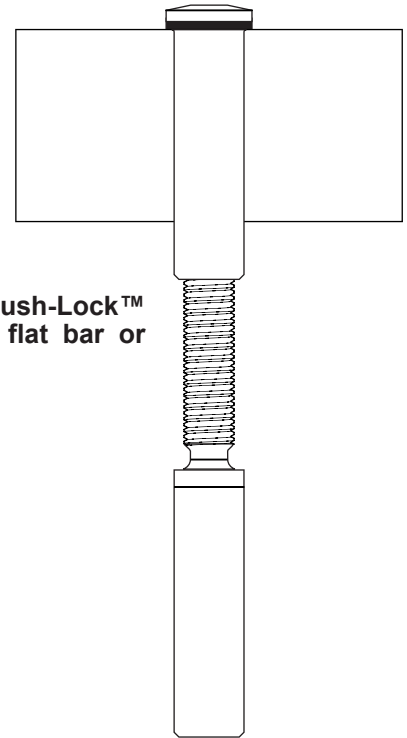


RECEIVER WITH PUSH-LOCK™ STUD FITTINGS

Used with square or rectangular tubing.
We recommend a minimum 1/4" wall.

Cable Dia: 1/8" and 3/16"

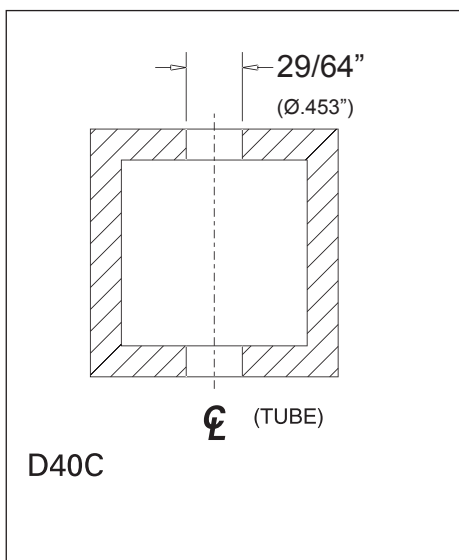

Receiver with Push-Lock™ Stud used with square or rectangular tubing.


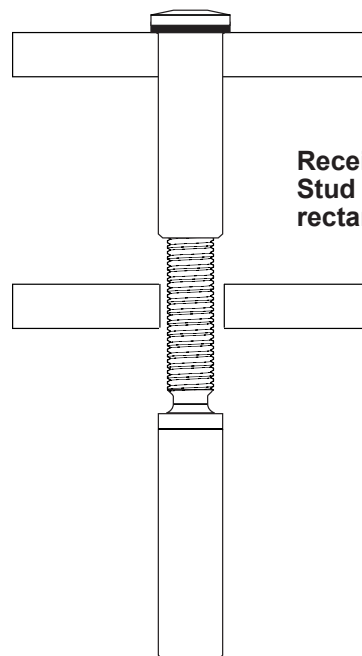


BORING INSTRUCTIONS

RECEIVER WITH PUSH-LOCK™ STUD FITTINGS

Used with minimum SC80 1-1/4" or larger round pipe or round steel tubing with comparable dimensions.

Cable Dia: 1/8" and 3/16"

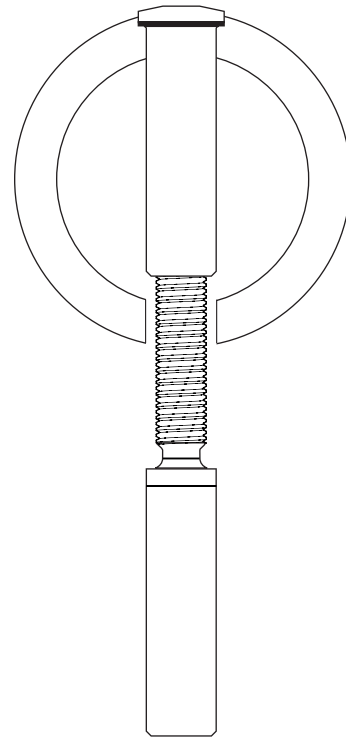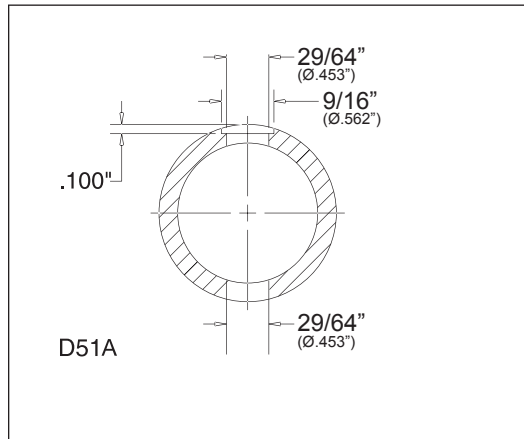

Receiver with Push-Lock™ Stud used with round pipe or tubing.

BORING AND SLOTTING INSTRUCTIONS For Intermediate Posts and Cable Braces

If you will be using grommets, see "Boring and slotting where grommets are being used" section on the next page.


Boring and slotting where grommets are NOT being used

Intermediate Posts and Cable Braces Hole Diameters for LEVEL RUNS

HOLE DIAMETERS
GROMMETS NOT BEING USED

Cable Dia.	Fittings FIELD Swaged	Fittings FACTORY Swaged	
		Using Threaded Stud	Using Swaging Ferrule
1/8"	5/32" (.156")	11/32" (.344")	17/64" (.265")
3/16"	7/32" (.219")		
1/4"	9/32" (.281")	15/32" (.469")	25/64" (.390")
5/16"	11/32" (.343")	19/32" (.594")	33/64" (.516")
3/8"	13/32" (.406")		

Intermediate Posts and Cable Braces Hole Diameters for STAIRS / SLOPED RUNS

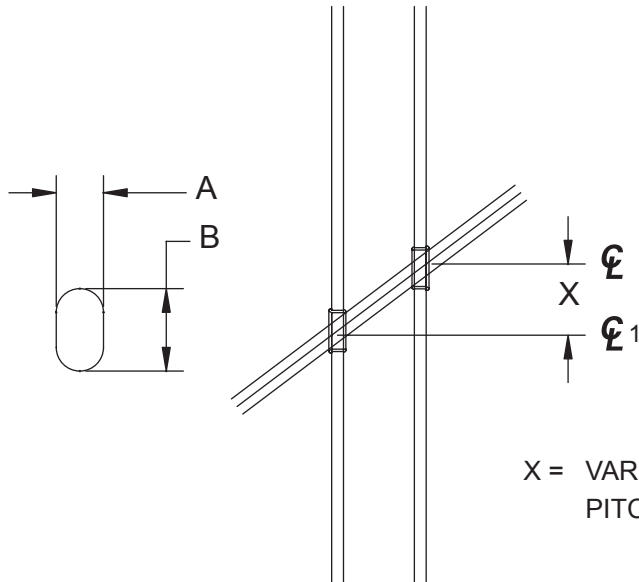

Cable Dia.	A	B
1/8"	5/32" (.156")	23/64" (.362")
3/16"	7/32" (.219")	29/64" (.445")
1/4"	9/32" (.281")	17/32" (.524")
5/16"	11/32" (.343")	29/64" (.607")
3/8"	13/32" (.406")	11/16" (.690")

X = VARIES ACCORDING TO
PITCH & FRAME ELEMENT

D101A

SLOTTING DIAGRAM FOR STAIRS/SLOPES
AT PITCHES 0° THROUGH 37°

BORING AND SLOTTING INSTRUCTIONS For Intermediate Posts and Cable Braces

(continued)

Boring and slotting where grommets ARE being used

Intermediate Posts and Cable Braces Hole Diameters for LEVEL RUNS

HOLE DIAMETERS □ GROMMETS **ARE** BEING USED



Cable or Fitting Diameter **passing through post** Hole sizes are actual sizes **after** finish is applied (*see note).

1/8"	1/4" (.250")
3/16"	
1/4"	5/16" (.312")

Grommets are not offered for diameters greater than 1/4".

***Note: Grommets will not install properly in under- or over-sized holes.**

Intermediate Posts and Cable Braces Hole Diameters for STAIRS / SLOPED RUNS

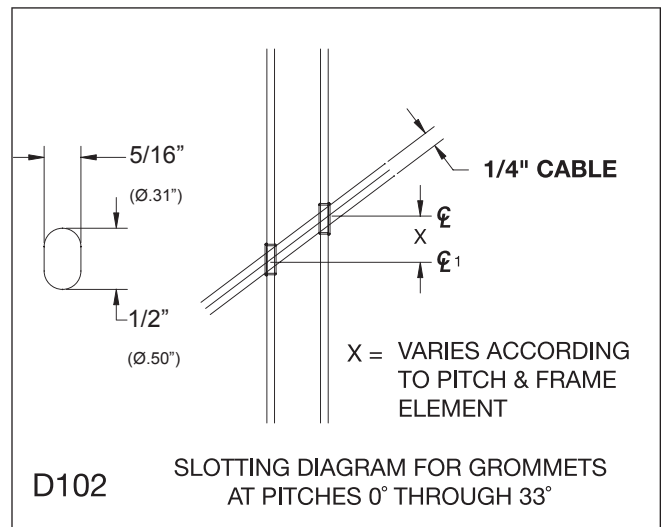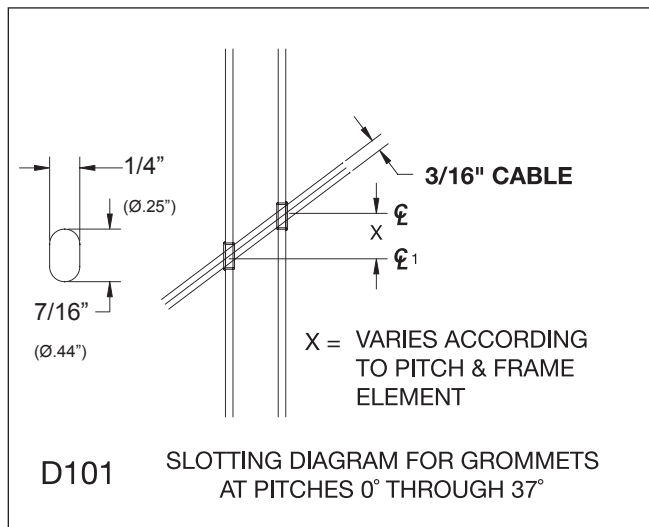


CORNER SECTION TUBE BORING INSTRUCTIONS AND TUBING SPECIFICATIONS

Note that the inside of the tubing cannot be sealed to prevent moisture inside the tubes. Therefore, we recommend stainless steel tubing for all **exterior** tubed corner section applications, to prevent rust inside the tubing.

Cable Dia.	Tubing Dia.	Wall Thickness	Inside Dia.	A Drilled and Reamed Hole Dia.
1/8"	3/8"	.064"	.209"	25/64" (.377")
3/16"		.065"	.245"	
1/4"		.049"	.277"	
5/16"	7/16"	.035"	.367"	7/16" (.440")
3/8"	1/2"	.042"	.416"	1/2" (.502")

Boring diagram for post to accept tubes

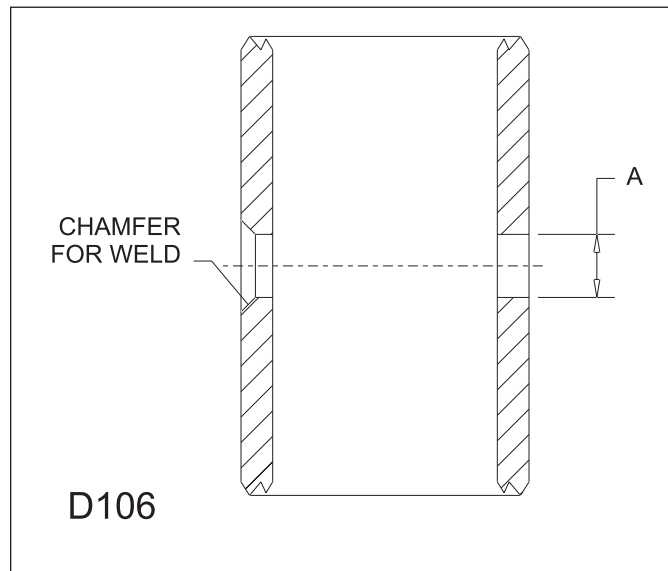


Note: Factory can supply drilled posts, tubing, and top and bottom rail sections for tubed corner sections. Please call for pricing.

VERTICAL RAILING BORING DIAGRAMS

Top Rail Holes

Top rail holes on the underside (only) of the top rail are drilled and tapped on 3.25" centers to accept Invisiware® 5/16-24 Threaded Studs for 1/8" or 3/16" diameter cable. (Note that every eighth cable is replaced with a rail brace, to keep the top and bottom rails from bending).

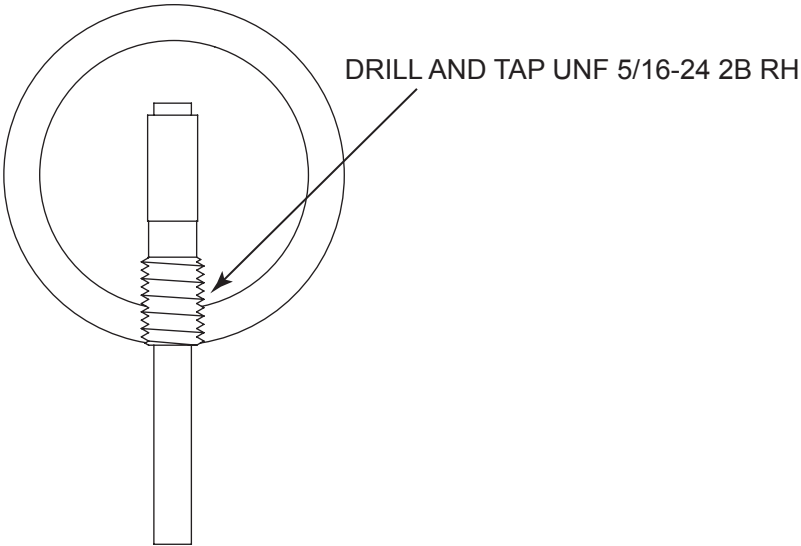

Bottom Rail Holes

Bottom rail holes are drilled 3.25" centers to accept Invisiware® Receivers for 1/8" or 3/16" diameter cable. (Note that every eighth cable is replaced with a rail brace, to keep the top and bottom rails from bending).

